

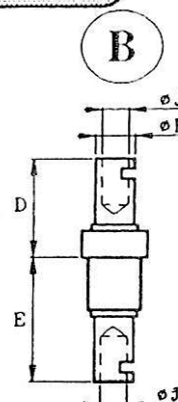
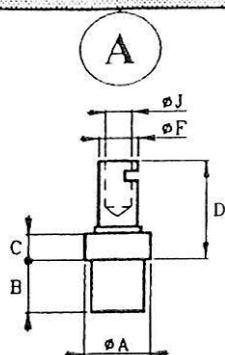
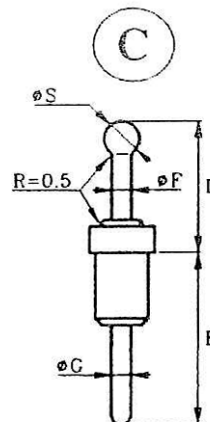


BORNES ET TRAVERSEES (ISOLANT P.T.F.E.)
SOLDER TERMINALS (INSULATING MATERIAL P.T.F.E.)

G

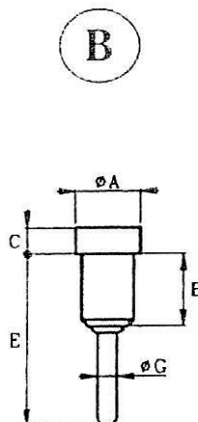

Rep. Item	Référence partielle Partial part number	Cotes en mm Dimensions in mm							Perçage Bore $\begin{smallmatrix} +0,1 \\ -0 \end{smallmatrix}$		Tension de claquage (Vcc) Breakdown voltage (V DC)
		Ø A	B	C	D	E	Ø F	Ø J	ép.T max. th. T	Ø P	
A	BPB-335F	4,00	3,00	1,00	4,50		2,20	1,80	2,00	3,30	2 200
B	T2PB-334F	4,00	3,00	1,00	4,50	6,00	2,20	1,80	2,00	3,30	2 000
A	BPB-446F	4,00	3,00	2,00	5,50		2,20	1,80	2,00	3,30	2 500
B	T2PB-454F	4,00	3,00	2,00	6,00	7,00	1,40	1,00	2,00	2,70	2 500

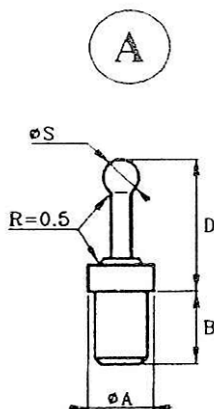

Rep. Item	Référence partielle <i>Partial part number</i>	Cotes en mm <i>Dimensions in mm</i>								Perçage ^{+ 0,1} <i>Bore</i> - 0		Tension de claquage (Vcc) <i>Breakdown voltage (V DC)</i>
		Ø A	B	C	D	E	Ø F	Ø G	Ø S	ép.T max. th. T	Ø P	
A	BLS-602	4,00	3,00	1,00	7,00		1,30		1,80	2,00	2,70	3 800
B	BR-585	4,00	3,00	1,00		8,00		1,30		2,00	2,70	3 800
C	TLS-526	4,00	3,00	1,00	7,00	8,00	1,30	1,30	1,80	2,00	2,70	3 800
A	BLS-846	4,50	4,00	2,00	6,20		1,00		1,50	3,00	3,50	5 500
C	TLS-847	4,50	4,00	2,00	6,20	8,00	1,00	1,00	1,50	3,00	3,50	5 500
A	BLS-858	5,00	3,00	4,00	9,50		1,50		2,00	2,00	4,10	6 500

Caractéristiques : voir page 0-1.
 Characteristics : refer to page 0-1.

Les cotes ne sont données qu'à titre indicatif.
 The dimensions given are for information only.